


SPECIFICATIONS


MODEL		SK35SR	SK50P
Type		SK35SR-6	SK50P-6
Machine Mass (canopy/cab)	kg	3,610/3,770	4,720/4,840
Bucket Capacity	m³	0.11	0.14
Bucket Width	mm	600	600
Arm Length	m	1.37	1.4
Bucket Digging Force	kN (kgf)	27.8 (2,830)	35.2 (3,589)
Arm Crowding Force	kN (kgf)	22.5 (2,290)	28.0 (2,855)
ENGINE			
Model		YANMAR 3TNV82A-B	YANMAR 4TNV88-B
Type		Water cooled, 4-cycle, 3-cylinder,direct injection,diesel engine	Water cooled, 4-cycle, 4-cylinder,direct injection,diesel engine
Power Output	kW/min ⁻¹ (ISO 14396)	18.1/2,400	29.6/2,400
Max. Torque	N·m/min ⁻¹ (ISO 14396)	79.4/1,440	132.9/1,440
Displacement	L	1.331	2.189
Fuel Tank	L	42.0	75
HYDRAULIC SYSTEM			
Pump		Two variable displacement pumps + one gear pump	
Max. Discharge Flow	L/min	2 x 38.4, 1 x 19.2	2 x 49.9, 1 x 33.8
Relief Valve Setting	MPa	23.0	23.0
Hydraulic Oil Tank (system)	L	20.4 (44.8)	27.9 (57.7)

WORKING RANGES


Model	SK35SR	SK50P
Boom length	2.47 m	2.985 m
Arm length	1.37 m	1.40 m
a- Max. digging reach	5,350	5,980
b- Max. digging reach at ground level	5,200	5,830
c- Max. digging depth	3,050	3,620
d- Max. digging height	4,870	5,760
e- Max. dumping clearance	3,490	4,180
f- Min. dumping clearance	1,310	1,860
g- Max. vertical wall digging depth	2,470	2,870
h- Min. swing radius	2,320	2,220
i- Dozer blade (height/depth)	395/320	375/385

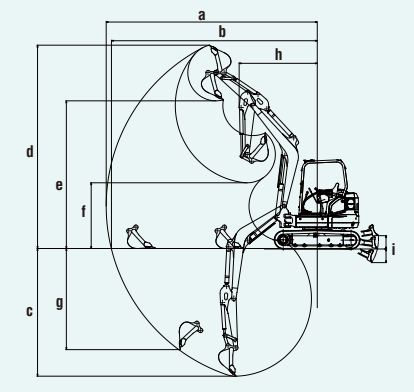

DIMENSIONS

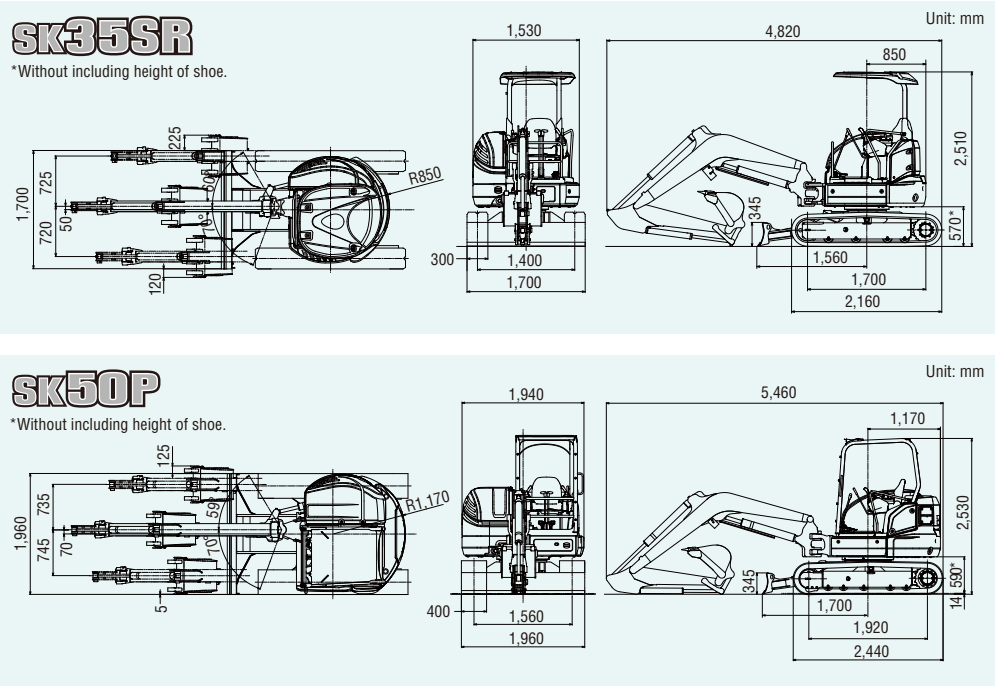

LIFTING CAPACITIES



Rating over front

Rating over side or 360 degrees

A: Reach from swing centerline to bucket hook
B: Bucket hook height above/below ground
C: lifting capacities in kilograms
Relief valve setting: 23.0 MPa

Canopy

SK35SR		Arm: 1.37 m, Bucket: 0.11 m³ ISO Heaped				Shoe: 300 mm Rubber shoe					
		1.0 m		2.0 m		3.0 m		4.0 m		At Max. Reach	Radius
B	4.0 m	kg								670	630
	3.0 m	kg								460	430
	2.0 m	kg				820	760	510	480	380	360
	1.0 m	kg				750	690	470	440	350	330
G. L.	kg			1,390	1,250	710	650	450	420	370	350
	-1.0 m	kg	2,450	2,450	1,410	1,270	700	650	450	420	410
	-2.0 m	kg			1,470	1,330	730	680		710	660

Notes:

- Do not attempt to lift or hold any load that is greater than these lift capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lift capacities.
- Lift capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
- Bucket lift hook defined as lift point.

Note: This catalog may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require. Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice.
Copyright by KOBELCO CONSTRUCTION MACHINERY CO., LTD. No part of this catalog may be reproduced in any manner without notice.

KOBELCO CONSTRUCTION MACHINERY CO., LTD.

17-1, Higashigotanda 2-chome, Shinagawa-ku, Tokyo 141-8626 JAPAN
Tel: +81 (0) 3-5789-2146 Fax: +81 (0) 3-5789-2135
www.kobelco-kenki.co.jp/english_index.html

Inquiries To:

KOBELCO

SK35SR-6/SK50P-6


MINI SK35SR EXCAVATOR SK50P

COMPACT YET TOUGH MINI

Now KOBELCO has taken the next evolutionary step by packing even more digging power and practical performance features into the SK35SR/SK50P while maintaining a short tail swing. The new Energy Conservation Mode saves even more fuel, and KOBELCO's proprietary iNDr Cooling System ensures protection from dust and easy maintenance.



We Save You Fuel
Achieving a Low-Carbon Society

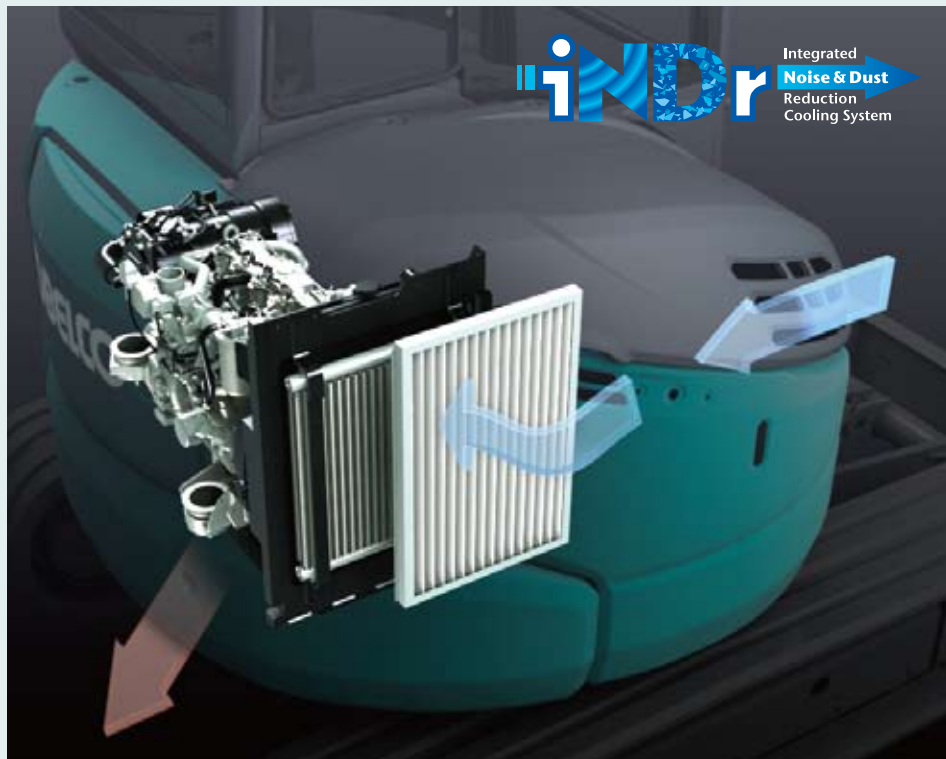

Protection from Dust and Easy Maintenance

The iNDR filter fitted in front of the cooling system ensures easy cleaning. The iNDR system on the SK35SR/SK50P features air intake at the front of the machine and air exhaust underneath. It functions in the same way as the iNDR System on the SR series machines.


Visual Checking and Easy Cleaning

Because the iNDR filter removes dust from the intake air, cooling components stay dirt-free and do not require regular cleaning. The iNDR filter itself can be easily removed and cleaned without the use of tools.



iNDR Filter

The stainless-steel filter is extremely effective against dust, with 30-mesh wave-type screen that removes tiny dust particles from the intake air.

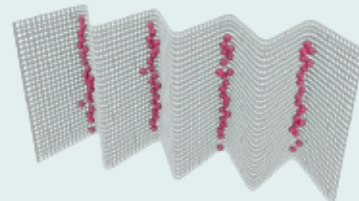

•30-mesh means that there are 30 holes formed by horizontal and vertical wires in every square inch of filter.

Fuel Saving

Energy Conservation Mode

The SK35SR/SK50P adapts S mode which enables 25 % (23 %: SK50P) less fuel consumption compared with H mode.



SK35SR: **25%** less fuel consumption

SK50P: **23%** less fuel consumption

Comfortable Work Environment

Spacious Work Environment

Broader floor space and a greater sliding range for the seat give operators plenty of foot room. Wide operational space is provided with more room between the left and right control consoles.



Color Liquid Crystal Monitor (Optional)

The color crystal monitor is fitted as option. Operation data as well as the full range of machine-status data can readily be checked.



Operator Safety

Reliable Cab/Canopy Structure



TOPS and TOP GUARD LEVEL 1 (SK35SR)



ROPS and TOP GUARD LEVEL 1 (SK50P)




ROPS and TOP GUARD LEVEL 1 (SK50P)

Efficient Performance

Integrated-Flow Pump System

KOBELCO's IFPS utilizes three pumps to optimize performance, with the dozer pump providing additional digging power as needed.

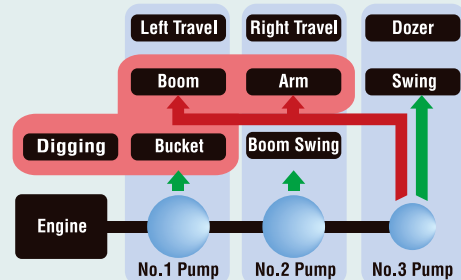

Automatic Two-Speed Travel

Two-speed travel function automatically shifts into Low Mode when a load is applied.

Travel Switch

The travel lever is fitted with the travel switch for easy switching to H-Mode travel.



Dozer-Blade Shape

KOBELCO's unique blade design solves this problem by forming the earth into an arc that always falls forward.



Wide Working Range

A larger boom and arm are provided as standard equipment to ensure a wider working range.

Short Tail Swing

The compact tail swing improves operating efficiency in limited space.

Tail Overhang:
0 mm :SK35SR
190 mm :SK50P



Max. Digging Reach:
5,350 mm :SK35SR
5,980 mm :SK50P




Easy Daily Maintenance



Easy Access to Engine Compartment



High-grade fuel filter



Pre fuel filter with built-in water separator



Air cleaner



Easy Access to Cooling Unit



Hour meter



Two-piece floor mats for easy washing

Reliable Construction



Bucket
Cast-iron idler link provide greater strength.



Dozer
Box construction dozer supports provide greater strength.



Swing bracket
Large, thick cast-iron swing bracket/front bracket.



Hydraulic piping
The hydraulic piping is housed inside the swing bracket.